

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 834 815 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
08.04.1998 Bulletin 1998/15

(51) Int Cl.<sup>6</sup>: G06F 13/42, H04L 29/06

(21) Application number: 97307741.5

(22) Date of filing: 01.10.1997

(84) Designated Contracting States:  
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC  
NL PT SE  
Designated Extension States:  
AL LT LV RO SI

(72) Inventors:  
• Fujimori, Takahiro, c/o Sony Corp.  
Shinagawa-ku, Tokyo (JP)  
• Tanaka, Tomoko, c/o Sony Corp.  
Shinagawa-ku, Tokyo (JP)

(30) Priority: 03.10.1996 JP 281808/96


(74) Representative:  
Robinson, Nigel Alexander Julian et al  
D. Young & Co.,  
21 New Fetter Lane  
London EC4A 1DA (GB)

(71) Applicant: SONY CORPORATION  
Tokyo 141 (JP)

(54) Data communication method, electronic apparatus and physical-layer-control integrated circuit

(57) In the IEEE 1394 communication standard, communication at a data rate of S100, S200, S400, S800, S1600, S3200 or at a faster speed in the future can be performed. When the 1394 communication is performed with an optical-fiber cable (5) and a UTP cable (6), it is possible to cope with high-speed communication by arranging bits being not used at a low speed, on a data stream. Transmission of data rates is realized by sending speed-control symbols at a predetermined speed. As for a Tp bias signal, an equivalent object is achieved by sending predetermined control symbols.

FIG. 6

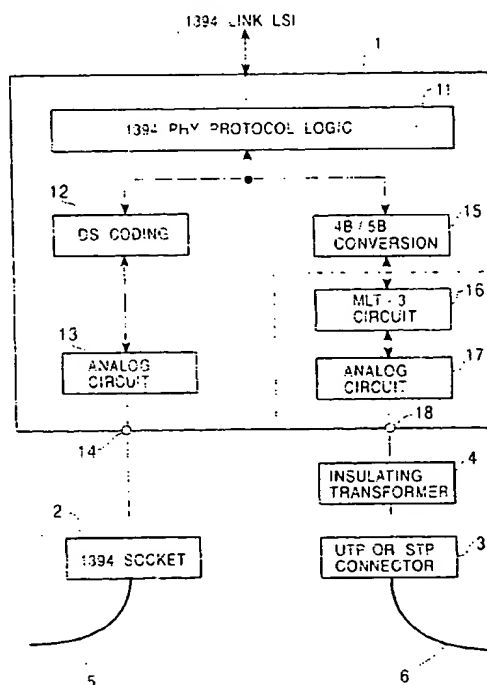

EP 0 834 815 A2

## Description

The present invention relates to a data communication interface.

A system in which electronic apparatuses, such as a digital-video tape recorder, a digital television receiver, and a personal computer, are connected by the IEEE 1394 (hereinafter referred to as the "1394") serial bus, and a digital-video signal, a digital-audio signal, a control signal and so forth are communicated among the electronic apparatuses is considered.

In the cable connecting the adjacent apparatuses in this system there are provided two pairs of twisted pair cables. One pair of cables is used to transmit data, while another pair of cables is used to transmit strobes. The data is coded by the DS (data strobe) coding method, and is transmitted.

In addition, a Tp bias signal is output to the one pair of twisted pair cables. When the Tp bias signal is detected by one apparatus connected by the 1394 cable, the apparatus having detected the bias signal become aware of its being connected to another apparatus, and resets the bus. When the bus has been reset, physical addresses are automatically assigned to the respective apparatuses. When a digital-video signal or the like is transmitted, transmission of the signal is started after performing acquisition of a necessary band and channel.

A signal for notifying another apparatus of one apparatus's data rate is transmitted to the other pair of twisted pair cables. The apparatuses directly connected by the twisted pair cables are capable of knowing each other's data rate.

As described above, conventionally, a cable defined by the 1394 (hereinafter referred to as a "1394 cable") is needed to realize communication via the 1394 serial bus (hereinafter referred to as the "1394 communication").

The present invention addresses the problem of providing a data communication method, an electronic apparatus and an integrated circuit in which the multi-purpose usability of the 1394 interface can be expanded by using multi-purpose cables for use in a communication interface in which a data rate is variable and a cable to be used is defined as in the 1394 communication interface.

To this end, according to one aspect of the present invention, there is provided a data communication method in which a plurality of electronic apparatuses provided with a communication interface based on the IEEE 1394 standard are connected by at least one type of cable among optical-fiber cables, unshielded-twisted pair (UTP) cables or shielded-twisted pair (STP) cables, and communication is performed among the electronic apparatuses.

The 1394 communication can perform communication at S100, S200, S400, S800, S1600 and S3200, and perform communication at a higher speed in the future.

When the 1394 communication is performed with the optical-fiber cable, the UTP cable and the STP cable, bits being not used at a low data rate to transfer data in a data packet to be transmitted are arranged on a data stream so as to be adapted for high-speed communication.

Data-rate transfer realized with identical-phase signals in the conventional 1394 communication is realized by sending predetermined speed-control symbols when the optical-fiber cable, the UTP cable and the STP cable are used.

In the data communication method an effect equivalent to that of a bias signal, defined in the IEEE 1394 standard, to be supplied to the cables is realized by sending predetermined control symbols.

According to another aspect of the present invention, there is provided an electronic apparatus provided with a terminal to which a cable defined in the IEEE 1394 standard is connected, and a terminal to which at least one type of cable among an optical-fiber cable, a UTP cable and an STP cable is connected.

According to a further aspect of the present invention, there is provided a data communication method in which, when an interface adapted for a data-communication system having a variable data rate is used to perform data communication among a plurality of electronic apparatuses, a cable defined in the data-communication system is used, wherein, when a communication channel for performing the data communication using a multi-purpose cable different from the cable defined in the data-communication system is used, the data communication is performed using an arrangement of bits corresponding to the maximum data rate, and when the multi-purpose cable is used to perform the data communication at a low data rate, a bit region being not used to transfer data in a data packet to be transmitted is arranged on a data stream so as to be adapted for the plurality of data rates.

According to a still further aspect of the present invention, there is provided an integrated circuit formed in a physical layer based on an interface adapted for a data-communication system whose data rate is variable, wherein the integrated circuit includes: a terminal to which a cable defined in the data-communication system is connected; and a terminal to which a multi-purpose cable different from the cable defined in the data-communication system is connected.

The 1394 communication and so forth may be realized by using an optical-fiber cable, a UTP cable and an STP cable. Thus, the multi-purpose usability of the 1394-communication interface and the like can be expanded.

Embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Figs. 1A to 1D are charts showing examples of arrangements of symbols on data streams, according to one embodiment of the present invention.

Figs. 2A to 2C are charts showing a method for transmitting data rates when a 1394 cable is used.

Fig. 3 is a chart showing an embodiment of a method for transmitting a data rate according to one embodiment of the present invention.

Fig. 4 is a chart showing examples of 4B/5B codes used in one embodiment of the present invention.

Figs. 5A and 5B are charts showing a method for realizing a Tp bias when an 1394 cable is used and an example of a method for realizing a Tp bias according to one embodiment of the present invention.

Fig. 6 is a block diagram showing a physical-layer control LSI according to one embodiment of the present invention.

Fig. 7 is a block diagram showing a physical-layer control LSI according to another embodiment of the present invention.

Fig. 8 is a block diagram showing a physical-layer control LSI according to a further embodiment of the present invention.

In the 1394 communication there are defined communication data rates of S100 (98.304 Mbps), S200 (196.608 Mbps) and S400 (393.216 Mbps). At first, a method for coping with the three speeds with an optical fiber and a UTP will be described.

In Figs. 1A to 1D are shown arrangements of symbols when a maximum data rate of S400 is used. Fig. 1A shows an arrangement of the symbols on a data stream. At a data rate of S100, only one symbol out of four symbols is used to perform communication as shown in Fig. 1B. Two symbols are used at S200 as shown in Fig. 1C, and all the symbols are used at S400 as shown in Fig. 1D. This manner enables communication at a quarter data rate and a half data rate. In addition, if communication at a speed equal to or more than S400 is newly defined in the future, the intervals of bits to be used are adjusted. In this case, nodes performing communication need to know each other's maximum data rate. Although the operating conditions of the symbols (in units of four bits) corresponding to the data rates are shown in Figs. 1A to 1D, the symbols may be arranged in units of one bit, two bits, one byte (eight bits) or one word (sixteen bits).

This method can be applied to the data area of a 1394 packet (being isochronous or asynchronous) shown in Fig. 3. In application, positions at which a transmitting end and a receiving end read symbols must be synchronized, which is executed by the following method. In other words, in the prefix area, control symbols "JK" are continuously transmitted. Both communication nodes must know that each node will start reading the symbols just after the continuous output of the symbols JK (or after the designated number of the symbols) is interrupted. The unique arrangement of the symbol "JK" is effective in symbol synchronization. Accordingly, in this embodiment, separation for each set of five bits is easily recognized by the symbol "JK". In Fig. 3 the Arb represents arbitration, and T represents a symbol "T"

(end).

Next, a method for transmitting data rates in the 1394 communication will be described. As shown in Figs. 2A to 2C, according to the 1394 cable, data rates of S100, S200 and S400 are transmitted by setting the levels of TpB and TpB\*, as bias signals which flow in the cable for transmitting the strobe signal, to mutually different predetermined levels during e.g., 100 to 120 nanoseconds.

In addition, according to the 1394 communication using the optical-fiber cable, of the present invention, the UTP cable or the STP cable, the data rates are transmitted based on the number of times for sending the control symbols. Fig. 4 shows a table of symbols used in the present invention. In the 1394 communication using the optical-fiber cable, the UTP cable or the STP cable, data of the 1394 communication is transmitted by 4B/5B codes. The 4B/5B codes are a coding method standard used in digital data communication, and are also used in 100-Mbps Ethernet, FDDI and so forth. Each symbol employed as a code has a different use depending on the communication method using the symbol. Differently from this one, there are many types of coding methods, which will be described below.

The 4B/5B codes have sixteen types of control symbols. The symbol "JK" is transmitted to the prefix area of a 1394 packet, and for example, the symbol "S" is used for notification of the data rate. At this time the data rate is transmitted based on the number of times for sending the symbol "S" to the prefix area of the 1394 packet. For instance, as shown in Fig. 3, no sending of the symbol "S" means S100, the sending once means S200, and the sending twice means S400. Even if a faster data rate is added to the 1394 standard in the future, this method is capable of coping with such a case by increasing the number of times for sending the symbol "S". Instead of the recognition with the number of times for sending the symbol "S", the case of sending another predetermined symbol, e.g., the symbol "R" may be recognized as S400.

Although the number of the symbols "JK" in the prefix region differs depending on each data rate, it is preferable to insert the symbol "S" used for notification of the data rate in the first half as so as circumstances permit. This is because it is preferable that data-rate information be recognized as early as possible. The symbol "JK" must be initially sent. The reason is that symbol synchronization needs to be performed as described above.

The foregoing has described the 4B/5B codes by way of example. However, coding methods such as RMI (restricted mark inversion), CMI, AMI, mB/1C, mB/nB, 4B/3T, and 2B1Q codes, to which the present invention can be applied, are realized by similarly assigning the 1394 control signals to the control codes of each coding method. For example, according to an example of 8B/10B coding, a symbol "Data-Prefix" is used as a control symbol (corresponding to the "JK"), and a symbol

"speed" is used as a transmission-rate communication symbol (corresponding to the "S"). The use of these is similar to that of the "JK" and the "S".

In addition, as shown in Fig. 5A, there is the Tp bias signal in the 1394 communication, which is used to detect with a cable one node being connected to another node. In other words, by fixing TpA and TpA\* as bias signals in a data-flow cable at high levels, the Tp bias is switched on. Also, as shown in Fig. 5B, in the optical-fiber, UTP or STP cable, by continuously sending a control symbol different from "Q", the Tp bias is switched on. When the symbol "Q" comes, the Tp bias is determined to be off. The "Q" represents a condition without a signal. For example, also a condition with a connector removed is equivalent to the condition "Q".

Even when the Tp bias is off, maintaining connection to another node requires synchronization. In this case continuation of the symbol "Q" for a long period is disadvantageous in synchronization. Accordingly, the use of a control symbol with large signal change, e.g., "1" obtains an advantage of maintaining PLL stability. The phrase "large signal change" has the following meaning.

An MLT-3 circuit 16 and an NRZI coding circuit 20 (described below) change their output levels whenever bit "1" is input thereto. Since the symbol "1" is apparently "1111" as shown in Fig. 4, the level changes with respect to a total of five bits. Accordingly, such a condition is described as large signal change. Therefore, as described below, in the case of the optical fiber which is not affected by unnecessary radiation, the symbol "1" may be used. The symbol "1" is data which is sent when there is no data, and is used to mainly maintain synchronization. In reverse, when a cable which is easily affected by unnecessary radiation, such as the UTP or STP cable, a control symbol with small signal change is needed.

In particular, in the case of the UTP or STP cable it is necessary that the unnecessary radiation be weakened when a control symbol with strong signal change, e.g., "1" is sent. Instead, when the symbol "1" needs to be sent, a control symbol with small signal change, e.g., "H" is sent for a response. The STP cable is less affected by the unnecessary radiation than the UTP cable since it is processed for shielding. However, it is preferable to use the symbol "H". As shown above, the control symbols "Q", "1" and "H" have respective characteristics, so it is ideal that they should be used to correspond to the type of cable. Nevertheless, when it is requested that control symbols common in any type of cable be used, proper selection is performed considering the characteristics and defects of each type of cable.

Concerning a physical-layer-control large-scale integration (LSI) according to the present invention, three examples adapted for the UTP or STP cable, for the POF (plastic optical fiber) cable and for both of these types will be described below.

A physical-layer control LSI 1 shown in Fig. 6 is

adapted for the UTP or STP cable. The physical-layer control LSI 1 is provided with a port 14 to which a socket 2 of a 1394 cable 5 is connected, and a port 18 to which a connector 3 of a UTP or STP cable (hereinafter referred to as "UTP/STP cable") is connected. The physical-layer control LSI 1 includes circuits for performing the 1394 standard process, and circuits for performing a process for the above-described UTP or STP transmission, which correspond to the two ports 14 and 18.

In the physical-layer control LSI 1 there is provided a 1394 physical-layer protocol logic 11. The 1394 physical-layer protocol logic 11 executes bus initializing, arbitration, and the various processes described with reference to Figs. 1A-1D to Figs. 5A and 5B.

A DS coding circuit 12 for performing the DS coding of sending data and the DS coding of received data is connected to the 1394 physical-layer protocol logic 11, and an analog circuit 13 for performing the level adjustment of the sending or received signal and so forth is connected to the DS coding circuit 12. The two circuits are ones for performing the 1394 standard process. The analog circuit 13 is connected to the port 14, and the 1394 socket 2 is connected to the port 14.

A 4B/5B conversion circuit 15 for performing the 4B/5B conversion of the sending data and the 5B/4B conversion of the received data is also connected to the 1394 physical-layer protocol logic 11. An MLT-3 circuit 16 for performing the MLT (multilevel transmission)-3 coding of the sending data and the MLT-3 reverse conversion of the received data is connected to the 4B/5B conversion circuit 15, and an analog circuit 17 for performing the adjustment of sending/received-signal level and so forth is connected thereto. The analog circuit 17 is connected to the port 18, and the UTP/STP connector 3 is connected to the port 18 via an insulating transformer 4. The MLT-3 circuit 16 performs voltage-level conversion based on three-valued logic, and gives a level change when bit "1" is input. The physical-layer control LSI 1 may consist of a single integrated circuit. However, a portion shown by a dotted line in Fig. 6 may consist of another integrated circuit. Practically, it is possible to build the insulating transformer 4 into the UTP/STP connector 3.

A physical-layer control LSI 31 shown in Fig. 7 is adapted for the POF cable. The physical-layer control LSI 31 is provided with a port 14 to which a socket 2 of a 1394 cable 5 is connected, and a port 19 to which a connector 33 (hereinafter referred to as a "POF connector") of a POF cable 7 is connected. The connector 33 also has an optical linking function, and specifically has optical/electronic and electronic/optical converters for conversion between optical information and electrical information. The physical-layer control LSI 31 includes circuits for performing the 1394 standard process, and circuits for performing a process for the above-described POF-cable transmission, which correspond to the two ports 14 and 19. In order to perform the POF-cable transmission, an NRZI (non-return to zero invert-

ed on ones) coding circuit 20 is used instead of the MLT-3 circuit 16. The NRZI coding circuit 20 is a two-valued logical circuit in which input of bit "1" performs inversion.

A physical-layer control LSI 41 shown in Fig. 8 is adapted for the UTP or STP cable, and the POF cable. The physical-layer control LSI 41 is provided with a port 14 to which a socket 2 of a 1394 cable is connected, and a port 21 to which both the UTP or STP cable and the POF cable are connected. The physical-layer control LSI 41 includes an MLT-3 circuit 16 used for connection to the UTP or STP cable, and an NRZI coding circuit 20 used for connection to the POF cable, and further includes a connector detector 22 for connecting the type of connector connected to the port 21, and first and second switches SW1 and SW2 which are controlled by the output of the connector detector 22. When the UTP or STP cable is connected to the port 21, both the first and second switches SW1 and SW2 are switched to the MLT-3 circuit 16. When the POF cable is connected to the port 21, both the first and second switches SW1 and SW2 are switched to the NRZI coding circuit 20.

The physical-layer control LSIs 1, 31 and 41 according to the present invention have the foregoing structures. Thus, when the 1394 socket 2 is connected to the port 14, the ON condition of the bias signal is transmitted by fixing TpA and TpA\* at the high level as shown in Fig. 5A, and the data rate is transmitted based on the levels of TpB and TpB\* as shown in Figs. 2A to 2C.

In addition, when the UTP/STP connector 3 is connected to the port 18, when the POF connector 33 is connected to the port 19, and when the UTP/STP connector 3 or the POF connector 33 is connected to the port 21, the ON condition of the bias signal is transmitted by sending the symbol different from the symbol "Q" as shown in Fig. 5B, and the data rate is transmitted based on the number of the symbols "S" to be sent in the prefix area of the 1394 packet as shown in Fig. 3.

Practically, there are a data line and a strobe line between the 1394 physical-layer protocol logic 11 and the DS coding circuit 12, and there are a data line and a control line between the 1394 physical-layer protocol logic 11 and the 4B/5B conversion circuit 15. The above-described JK, S, R and so forth are sent by the control line, using the Prefix region shown in Fig. 3, and the Q, I, H and so forth are sent by the control line, using the idle region shown in Fig. 3. The data is sent by the data line as shown in Figs. 1A to 1D, using the Data region shown in Fig. 3. Symbol "0" is sent as the "symbol (bit) being not used" shown in Figs. 1A to 1D. The "symbol (bit) being not used" means that the symbol (bit) is not used in data transfer, in other words, it is not used as data to be transferred in the data region of the packet shown in Fig. 3. However, for other different uses, for example, the symbol (bit) can be used to send the control data.

Normally, in the IEEE 1394 the data-transmission rate, which changes momentarily, is dynamically changed using the JK and S. Accordingly, a time for

sending symbols differs in accordance with each data rate. In addition, when sending or reception using the multi-purpose cable is performed, only blank portions are input under the influence of the rate as shown in Figs. 1A to 1D. Therefore, a bit arrangement adapted for the maximum rate needs to be considered.

At least preferred embodiments of the present invention relate to a communication interface in which a data-transmission rate (hereinafter referred to as a "data rate") is variable and a cable to be used is defined as in a communication interface based on the IEEE 1394 standard, and in particular, to a technique for performing data communication with multi-purpose cables such as optical-fiber cables, UTP (unshielded twisted pair) cables and STP (shielded twisted pair) cables.

### Claims

1. A data communication method in which a plurality of electronic apparatuses provided with a communication interface based on the IEEE 1394 standard are connected by at least one type of cable among optical-fiber cables, unshielded-twisted pair (UTP) cables or shielded-twisted pair (STP) cables, and communication is performed among said electronic apparatuses.
2. A data communication method according to Claim 1, wherein bits being not used at a low data rate to transfer data in a data packet to be transmitted are arranged on a data stream so as to be adapted for a plurality of data rates defined on the IEEE 1394 serial bus.
3. A data communication method according to Claim 1, wherein data rates are transmitted by sending one or more types of predetermined speed-control symbols by means of a data stream.
4. A data communication method according to Claim 3, wherein the types of said data rates are transmitted based on the number of times for sending said speed-control symbols into said data stream.
5. A data communication method according to Claim 1, wherein an effect equivalent to that of a bias signal, defined in the IEEE 1394 standard, to be supplied to said cables is realized by sending predetermined control symbols.
6. A data communication method according to Claim 1, wherein control symbols with small signal change are used instead of control symbols with strong signal change in order to weaken unnecessary radiation in said UTP cable or said STP cable.
7. An electronic apparatus provided with a terminal to

which a cable defined in the IEEE 1394 standard is connected, and a terminal to which at least one type of cable among an optical-fiber cable, a UTP cable and an STP cable is connected.

8. A data communication method in which, when an interface adapted for a data-communication system whose data rate is variable is used to perform data communication among a plurality of electronic apparatuses, a cable defined in said data-communication system is used,

wherein, when a communication channel for performing the data communication using a multi-purpose cable different from said cable defined in said data-communication system is used, the data communication is performed using an arrangement of bits corresponding to the maximum data rate, and when said multi-purpose cable is used to perform the data communication at a low data rate, a bit region being not used to transfer data in a data packet to be transmitted is arranged on a data stream so as to be adapted for the plurality of data rates.

9. A data communication method according to Claim 8, wherein said interface is a communication interface based on the IEEE 1394 standard, and said multi-purpose cable is any one type of cable among an optical-fiber cable, a UTP cable and an STP cable.
10. A data communication method according to Claim 8, wherein said data rates are transmitted by sending one or more types of predetermined speed-control symbols by means of said data stream.
11. A data communication method according to Claim 8, wherein the types of said data rates are transmitted based on the number of times for sending said one or more types of speed-control symbols into said data stream.
12. A data communication method according to Claim 8, wherein an effect equivalent to a bias signal defined in said data-communication system to be supplied to said cable is realized by sending a predetermined control symbol.
13. A data communication method according to Claim 12, wherein, when said predetermined control symbol has a strong signal change, a control symbol with small signal change is used if necessary to weaken unnecessary radiation.
14. An integrated circuit formed in a physical layer based on an interface adapted for a data-communication system whose data rate is variable,

wherein said integrated circuit includes:  
a terminal to which a cable defined in said data-communication system is connected; and  
a terminal to which a multi-purpose cable different from said cable defined in said data-communication system is connected.

FIG. 1A



FIG. 1B

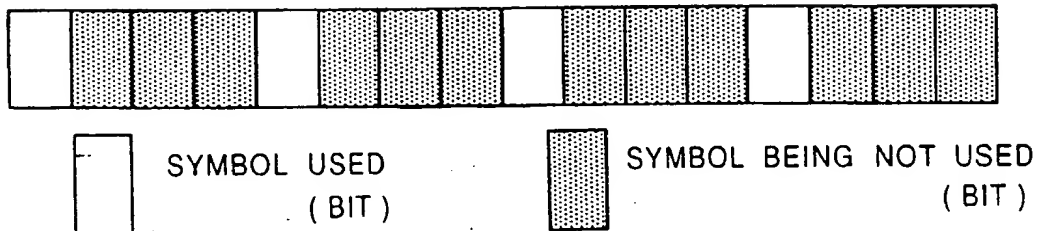


FIG. 1C

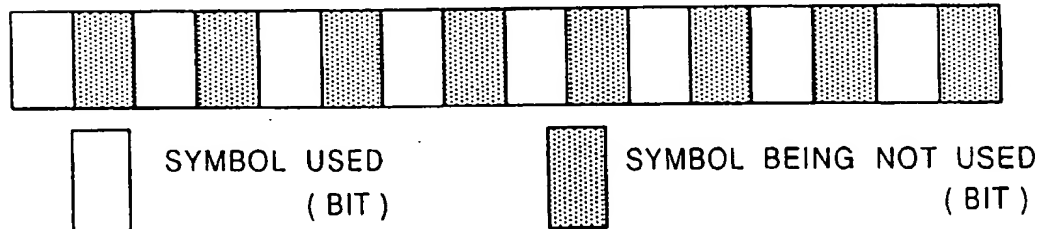


FIG. 1D



FIG. 2A      FIG. 2B      FIG. 2C

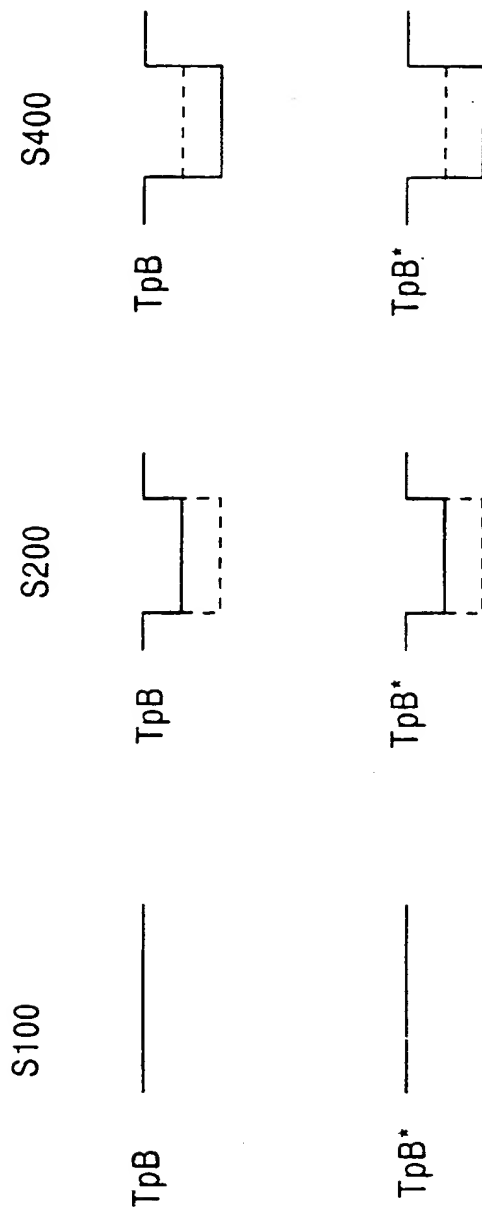


FIG. 3

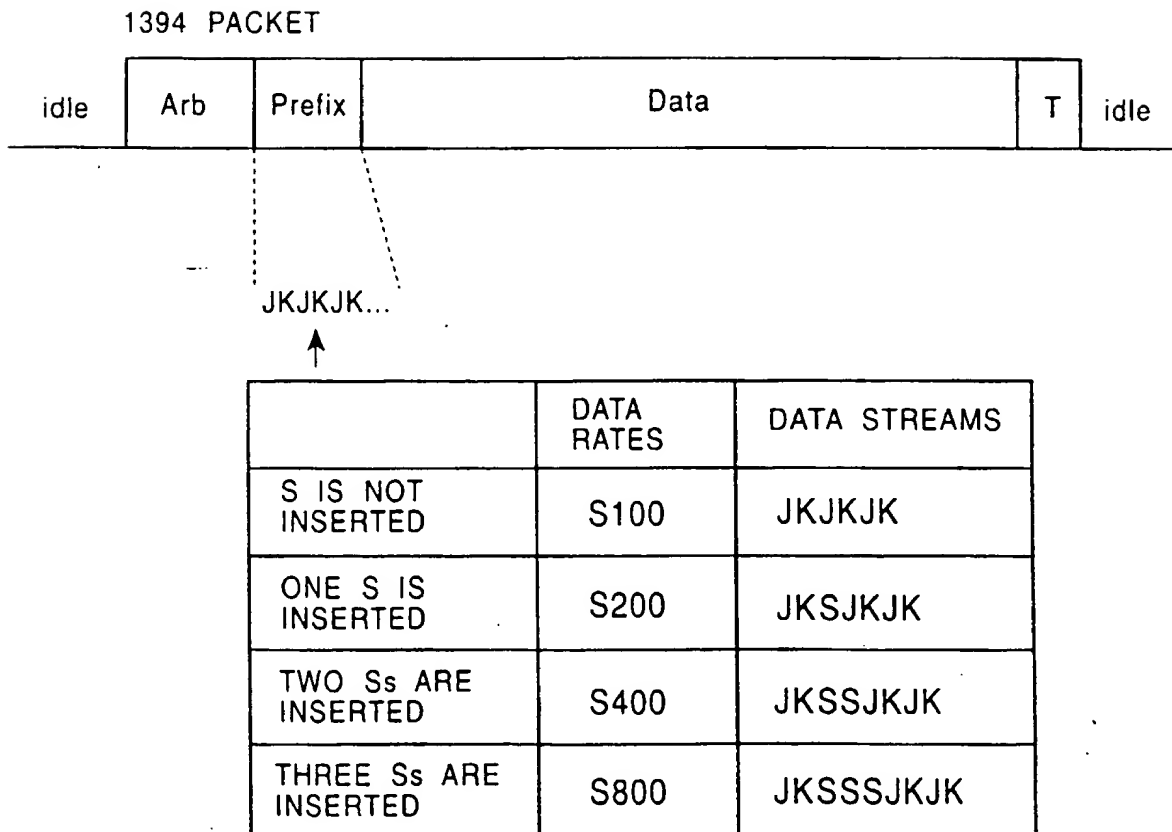


FIG. 4

SYMBOLS	5B	4B
0	1 1 1 1 0	0 0 0 0
1	0 1 0 0 1	0 0 0 1
2	1 0 1 0 0	0 0 1 0
3	1 0 1 0 1	0 0 1 1
4	0 1 0 1 0	0 1 0 0
5	0 1 0 1 1	0 1 0 1
6	0 1 1 1 0	0 1 1 0
7	0 1 1 1 1	0 1 1 1
8	1 0 0 1 0	1 0 0 0
9	1 0 0 1 1	1 0 0 1
A	1 0 1 1 0	1 0 1 0
B	1 0 1 1 1	1 0 1 1
C	1 1 0 1 0	1 1 0 0
D	1 1 0 1 1	1 1 0 1
E	1 1 1 0 0	1 1 1 0
F	1 1 1 0 1	1 1 1 1
I (IDLE)	1 1 1 1 1	1 0 1 0
H (HALT)	0 0 1 0 0	0 0 0 1
JK (STARTING DELIMITER)	1 1 0 0 0 AND 1 0 0 0 1	1 1 0 1
T (ENDING DELIMITER)	0 1 1 0 1	0 1 0 1
R (RESET)	0 0 1 1 1	0 1 1 0
S (SET)	1 1 0 0 1	0 1 1 1
Q (QUIET)	0 0 0 0 0	0 0 1 0
V (VIOLATION)	0 0 0 0 1	0 0 1 0
V	0 0 0 1 0	0 0 1 0
V	0 0 0 1 1	0 0 1 0
L (EMBEDDED DELIMITER)	0 0 1 0 1	0 0 1 0
V	0 0 1 1 0	0 0 1 0
V	0 1 0 0 0	0 0 1 0
V	0 1 1 0 0	0 0 1 0
V	1 0 0 0 0	0 0 1 0

FIG. 5A

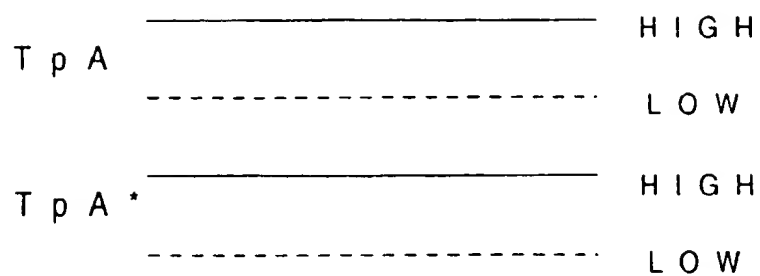


FIG. 5B

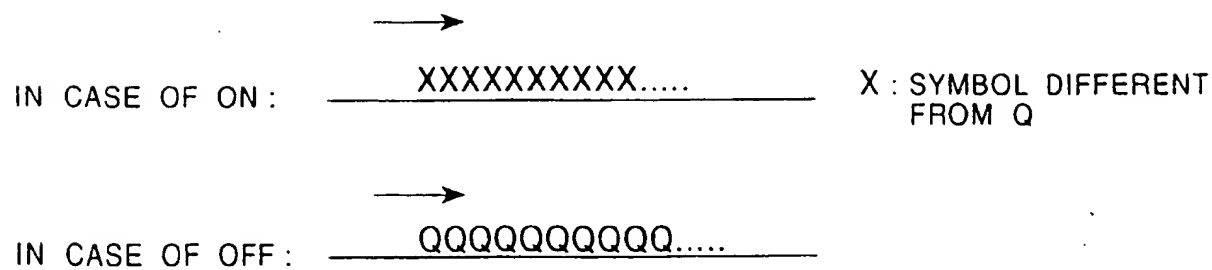


FIG. 6

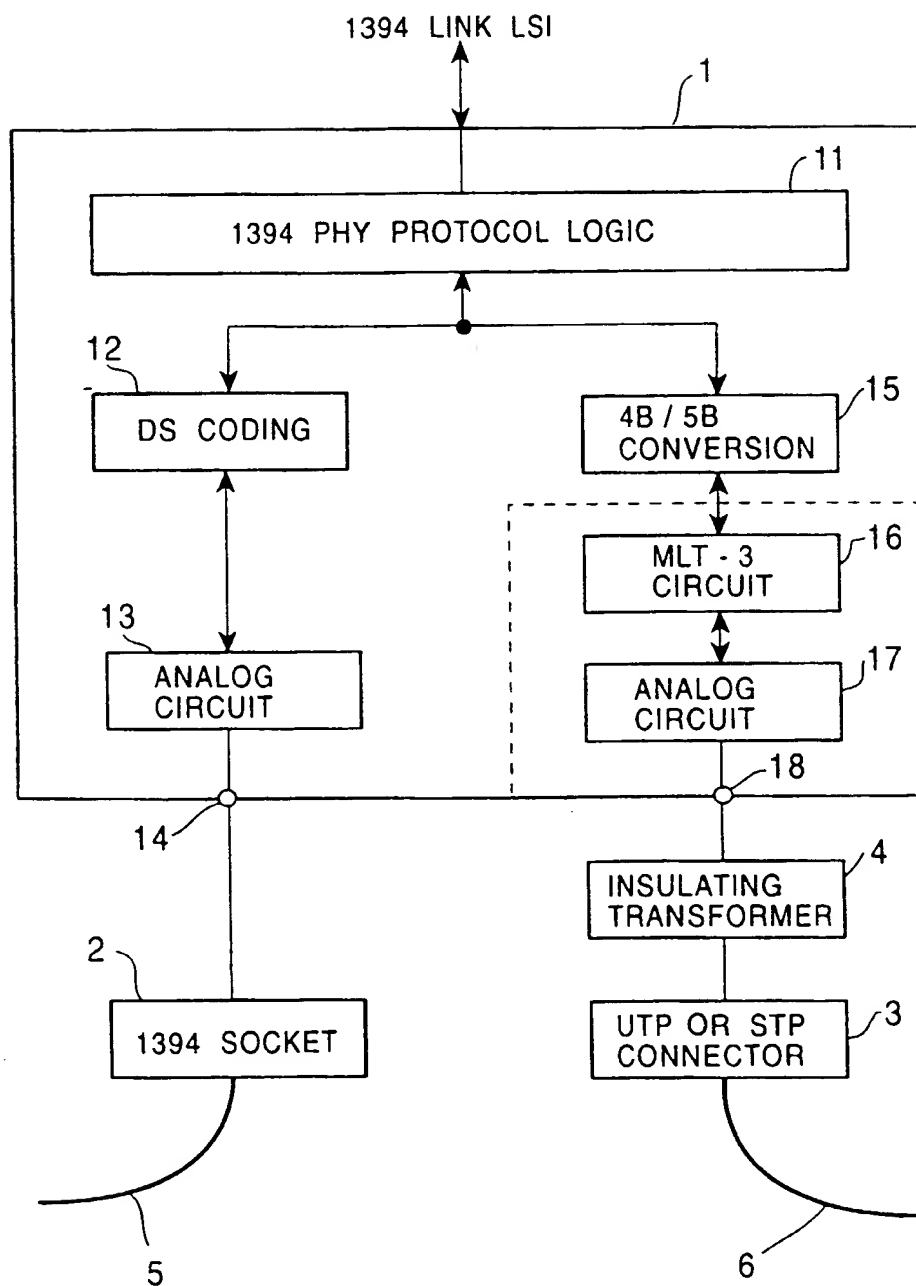


FIG. 7



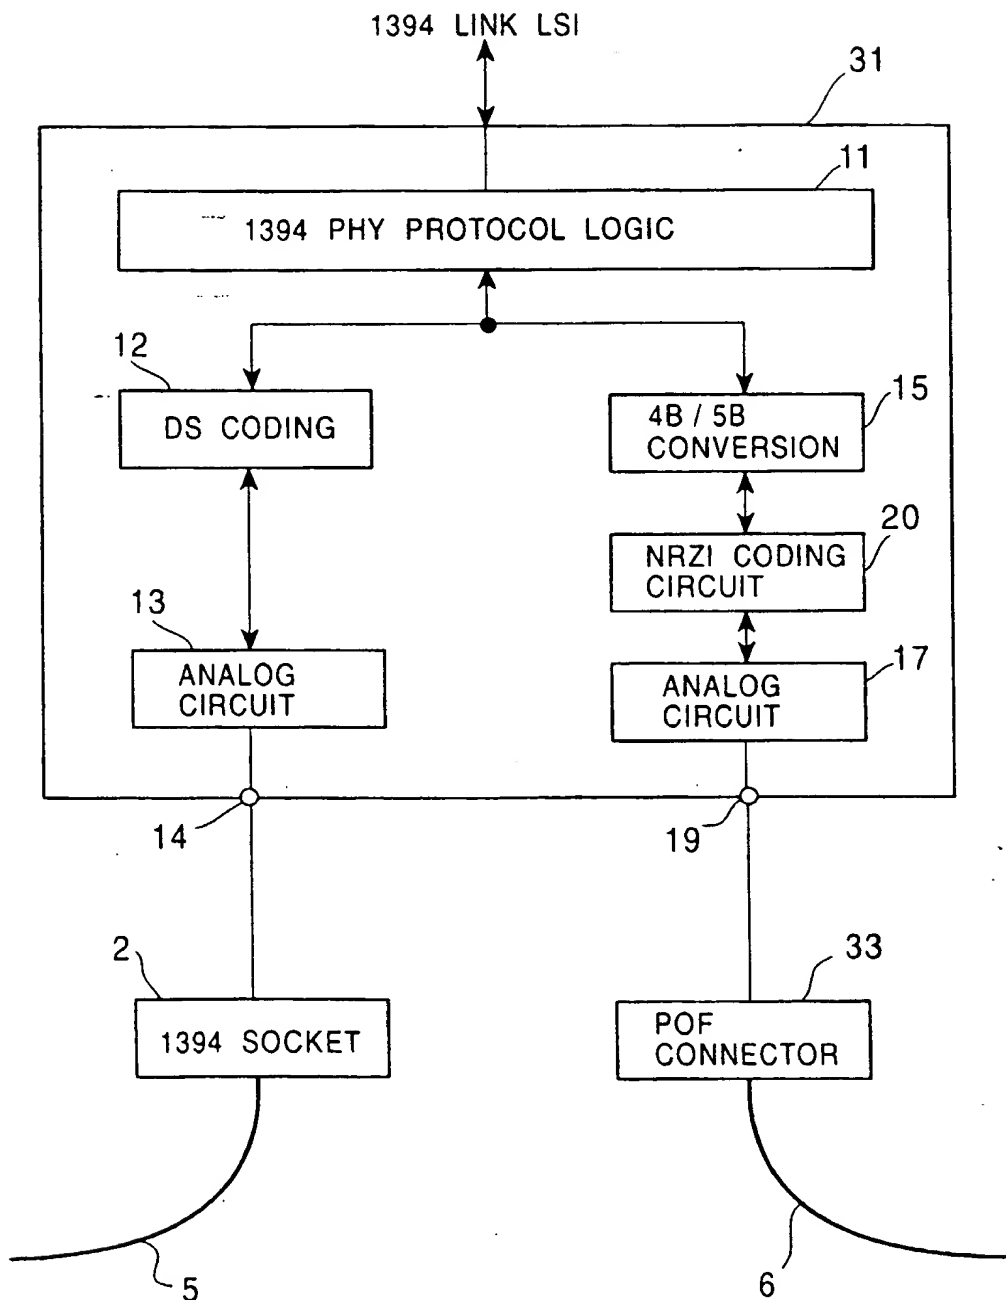


FIG. 8



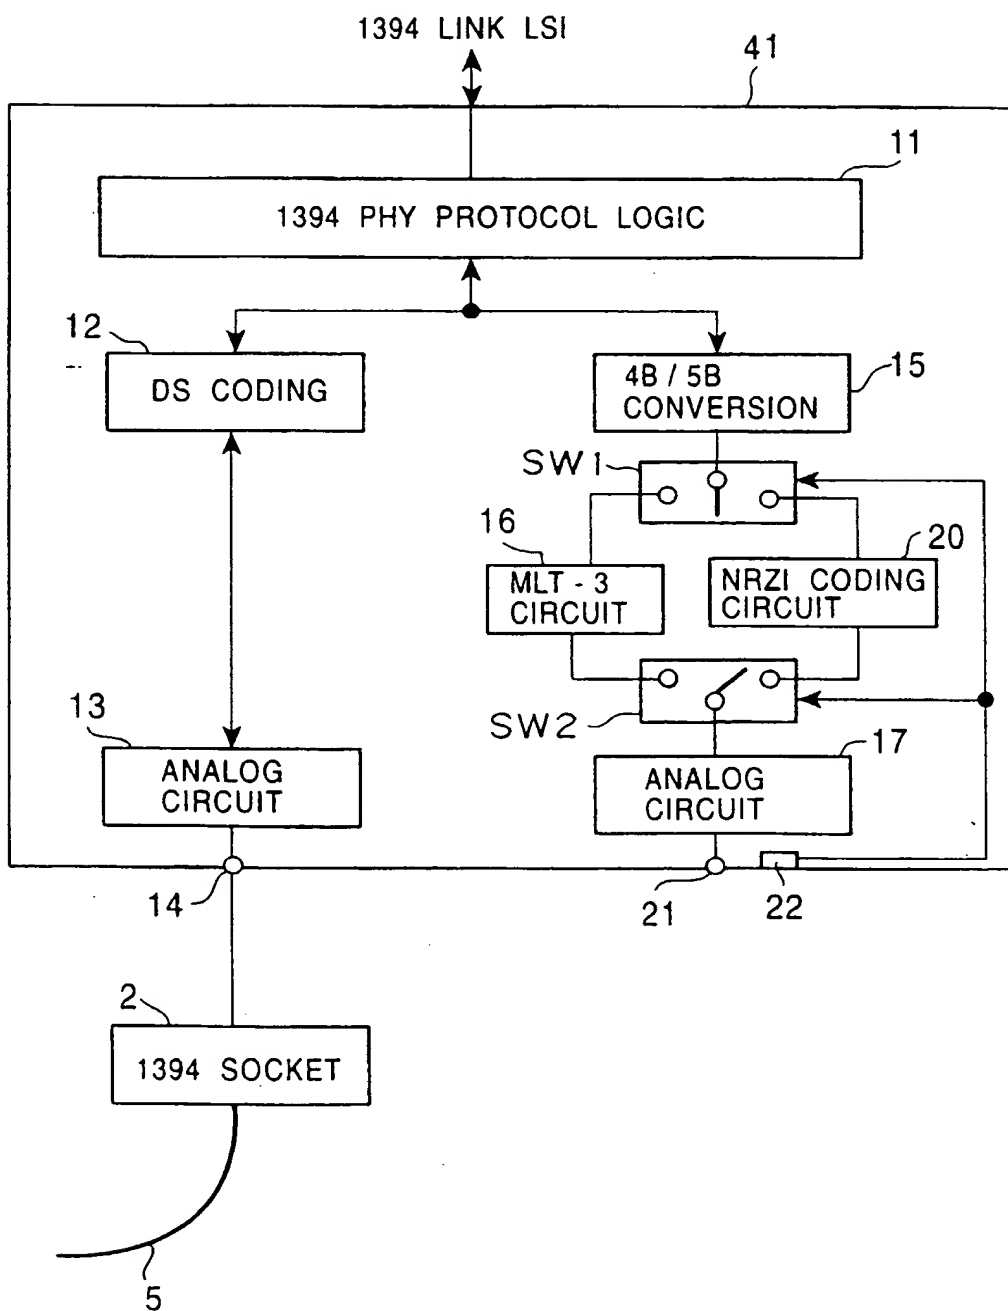

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 0 834 815 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
19.05.1999 Bulletin 1999/20

(51) Int Cl.<sup>6</sup>: G06F 13/42, H04L 29/06

(43) Date of publication A2:  
08.04.1998 Bulletin 1998/15

(21) Application number: 97307741.5

(22) Date of filing: 01.10.1997

(84) Designated Contracting States:  
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC  
NL PT SE  
Designated Extension States:  
AL LT LV RO SI

(72) Inventors:  
• Fujimori, Takahiro, c/o Sony Corp.  
Shinagawa-ku, Tokyo (JP)  
• Tanaka, Tomoko, c/o Sony Corp.  
Shinagawa-ku, Tokyo (JP)


(30) Priority: 03.10.1996 JP 281808/96

(74) Representative:  
Robinson, Nigel Alexander Julian et al  
D. Young & Co.,  
21 New Fetter Lane  
London EC4A 1DA (GB)

(54) **Data communication method, electronic apparatus and physical-layer-control integrated circuit**

(57) In the IEEE 1394 communication standard, communication at a data rate of S100, S200, S400, S800, S1600, S3200 or at a faster speed in the future can be performed. When the 1394 communication is performed with an optical-fiber cable (5) and a UTP cable (6), it is possible to cope with high-speed communication by arranging bits being not used at a low speed, on a data stream. Transmission of data rates is realized by sending speed-control symbols at a predetermined speed. As for a Tp bias signal, an equivalent object is achieved by sending predetermined control symbols.

FIG. 6

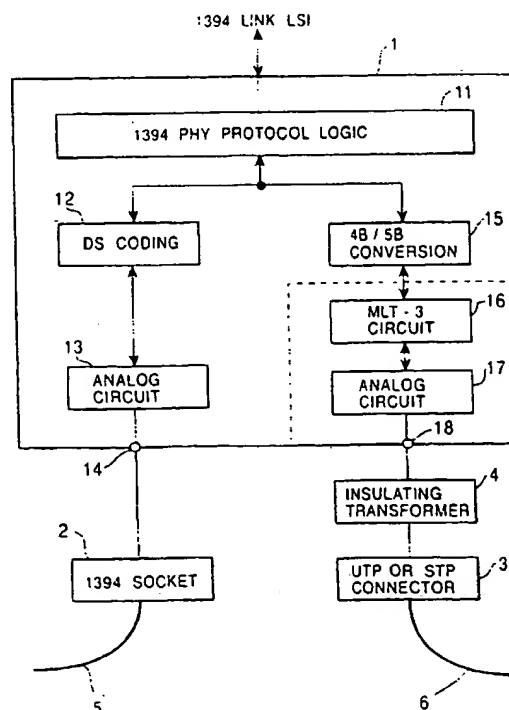

EP 0 834 815 A3

## EUROPEAN SEARCH REPORT

Application Number  
EP 97 30 7741

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	US 5 485 488 A (VAN BRUNT ROGER W ET AL) 16 January 1996 * column 1, line 12-23 *	1,5-7,14	G06F13/42 H04L29/06
Y	* column 3, line 49 - column 4, line 14 * ---	3	
X	US 5 559 967 A (OPRESCU FLORIN ET AL) 24 September 1996 * column 2, line 57 - column 3, line 13 * * column 6, line 8-19 * ---	1,7,14	
Y	"P1394 LINK LAYER READ REQUEST LINKED LIST MECHANISM" IBM TECHNICAL DISCLOSURE BULLETIN, vol. 38, no. 3, 1 March 1995, pages 447-451, XP000508105 * figures 1,2 * ---	3	G06F
A	US 5 509 126 A (OPRESCU FLORIN ET AL) 16 April 1996 * column 7, line 44 - column 8, line 43; figure 7; table 5 * ---	1-14	
A	US 5 504 757 A (MCNEILL JR ANDREW B ET AL) 2 April 1996 * column 6, line 34 - column 7, line 19 * ---	1-14	
A	EP 0 658 010 A (SONY CORP) 14 June 1995 * column 7, line 56 - column 8, line 28; figure 2 * * column 12, line 52 - column 13, line 13 * ---	1-14	
A	KUNZMAN A J ET AL: "1394 HIGH PERFORMANCE SERIAL BUS: THE DIGITAL INTERFACE FOR ATV" IEEE TRANSACTIONS ON CONSUMER ELECTRONICS, vol. 41, no. 3, August 1995, pages 893-900, XP000539552 * the whole document * ---	1-14	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 31 March 1999	Examiner Nygren, P
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document	



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 97 30 7741

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X,P	EP 0 762 684 A (SONY CORP) 12 March 1997 * page 2, line 12-17 * -----	1,7	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 31 March 1999	Examiner Nygren, P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1501 (03/92) (IMP. 2/11)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 97 30 7741

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

31-03-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5485488 A	16-01-1996	AU 2104495 A WO 9527353 A	23-10-1995 12-10-1995
US 5559967 A	24-09-1996	AU 6446594 A WO 9422093 A	11-10-1994 29-09-1994
US 5509126 A	16-04-1996	AU 6410294 A WO 9422091 A	11-10-1994 29-09-1994
US 5504757 A	02-04-1996	NONE	
EP 0658010 A	14-06-1995	JP 7222263 A CN 1115928 A	18-08-1995 31-01-1995
EP 0762684 A	12-03-1997	CN 1149796 A JP 9116593 A	14-05-1997 02-05-1997

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82